


SAS


Reset module IP address by inverter

Reset the module for Sununo Plus

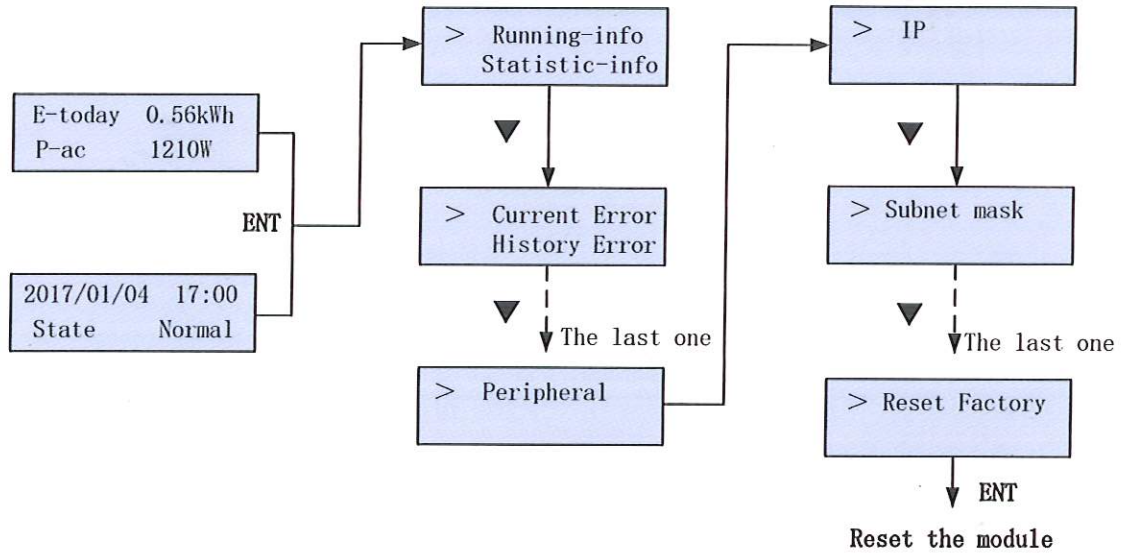


Reset the module for Suntrio Plus


Press the key “ENT”, press the key “>” twice, and choose “Run-Info”, and press the key “V”, choose “Module-Inform”.

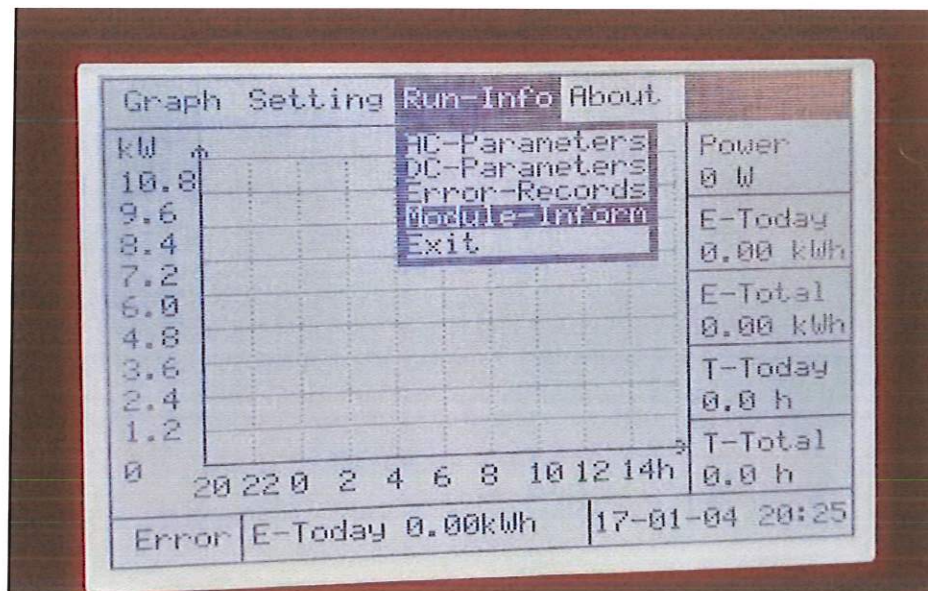

Choose “Reset”, then, the module will be reset.

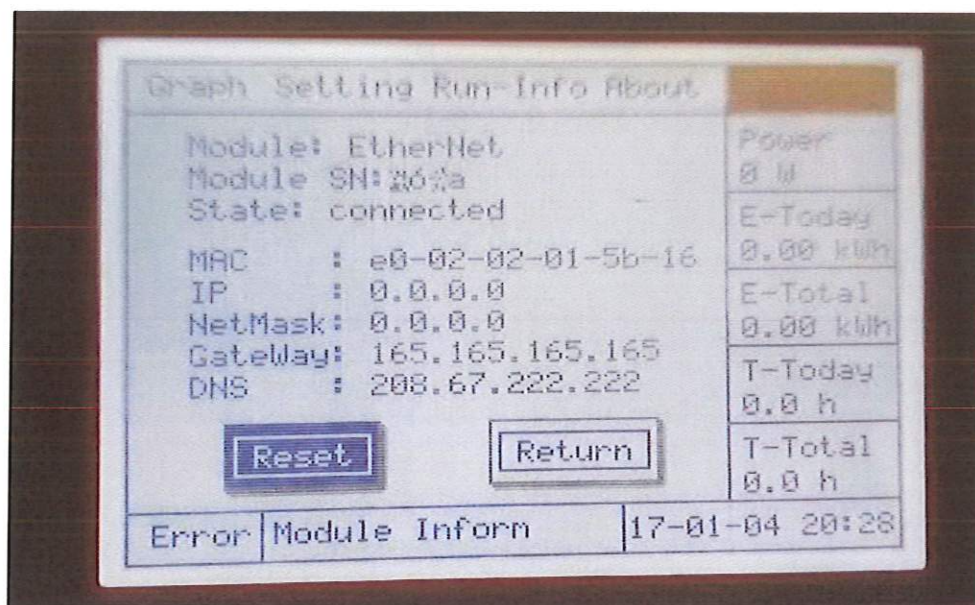

Review the module's information:

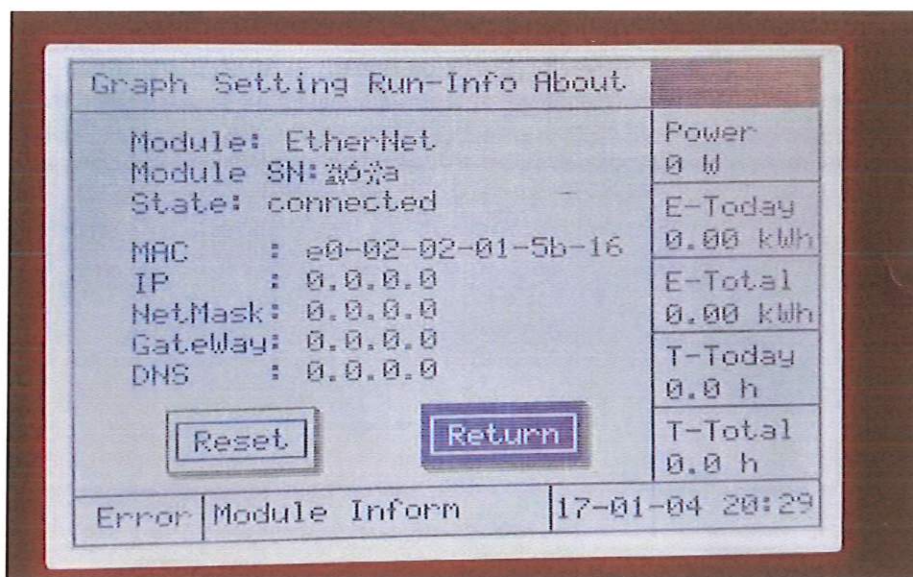

This guide is shoot for WIFI and Ethernet module